


Operators can mount and laminate digital prints and apply application tape to any flat surface, banner, table, flat furniture, PMMA up to thicknesses of 60 mm.

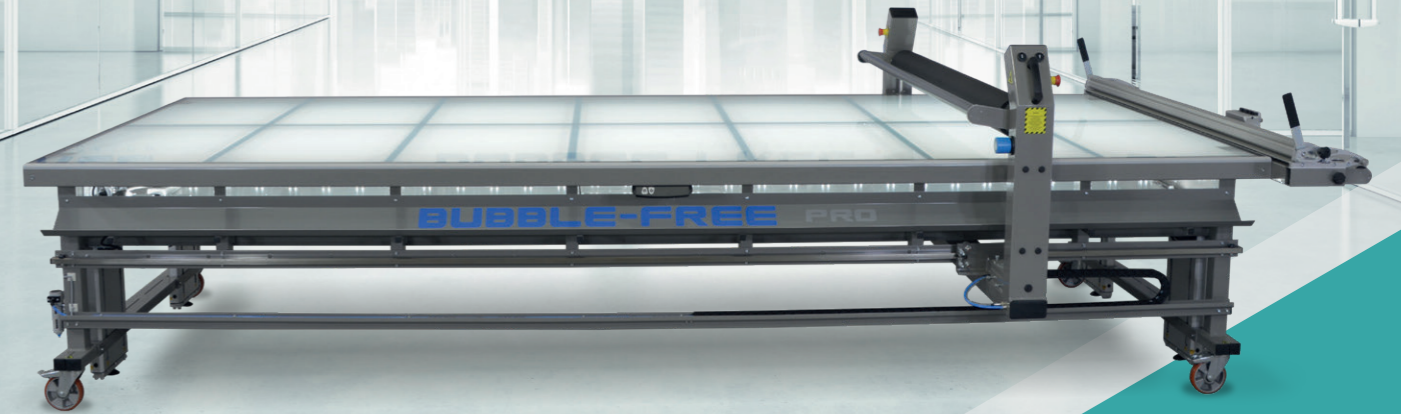

## BUBBLE-FREE APPLICATOR

- Quick mounting without any bubbles or wrinkles
- Controlled application pressure prevents media stretching
- Easy positioning of material to be mounted
- Fast production speed for increased productivity
- Quick and easy to learn
- Self healing cutting mat

### BUBBLE-FREE

Akkor-Dekor Ltd. • Hungary H-2225 Üllő, Hatháza u. 6.  
Phone: +36 1 599-9234, +36 1 599-9235  
E-mail: akkordekor@akkordekor.hu • www.bubblefree.hu

# BUBBLE-FREE PRO

## OPTIONAL ACCESSORIES

- silent compressor (85 l/min, 49-56 dB)
- roll holder at the end of the table
- 5 mm safety PVC cutting mat
- side tray
- maximum thickness of media is 100/130/180 mm
- second roller for large tables
- KeenCut EVO3 cutting unit
- electric height adjustment system between 850 mm and 1100 mm
- fluffy roller

### SPECIFICATIONS:

Standard table widths	1480, 1680, 2180 mm
Standard working widths	1440, 1640, 2140 mm
Standard table lengths	2800, 3400, 4000, 5400, 7000 mm
Standard working lengths	2450, 3050, 3650, 5050, 6650 mm
Standard operation height	850 mm
Maximum thickness of media	60 mm
Diameter of the rubber roller	130 mm
Machine weight	180, 270, 320, 480, 650 kg
Warranty	1+2 year

We keep the rights for any future technical changes.

[www.bubblefree.hu](http://www.bubblefree.hu)

## BUBBLE-FREE APPLICATOR IS AVAILABLE WITH

- ▶ glass table top and LED backlighting including PVC cutting mat
  - ▶ MDF table top with optional PVC cutting mat.
- Can be ordered in customized dimensions.**

The pressure roller has 15mm thick soft rubber coating to guarantee the bubble free application.


The pressure roller is controllable from both sides.

The pneumatic system uses FESTO parts. The pressure of the roller can be adjusted within a wide range by the pneumatic controllers.

High durability paint in RAL colour 9007.

The castors with brakes allow the table to be easily moved or fixed in position.

The manual height adjustment feature enables users to adjust table height within 10 cm and level the table on uneven surfaces.



FESTO